


# Ferrule Cock Key

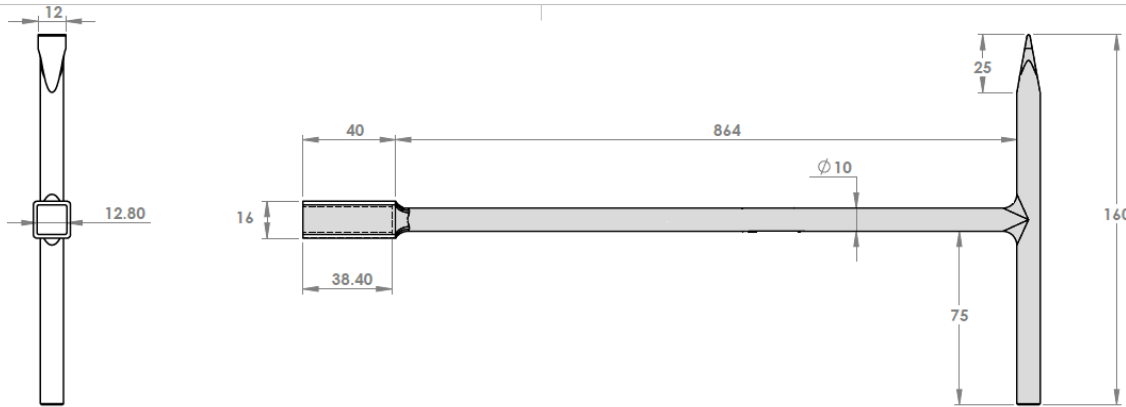

## Ferrule Key Technical Data

The EJ Hadaway range of Australian standard valve keys comply with AS/NZS 2638 gate valves for waterworks purposes and are used to open gate valves and services.

They are manufactured made in Dandenong Victoria and hot dipped galvanised to AS/NZS 4680.

The fixed handle includes a chisel on one end.

Ferrule Cap Extension Spindles are used to reach Ferrule cocks that are under ground and are deeper than the length of a Ferrule key

There are 3 standard sizes available for extension spindles- 300mm, 450mm and 600mm. Special lengths can also be manufactured.

# Ferrule Cap Extension spindles

